




**GLASTEEL™ ACT-100 UNDERGROUND SINGLE WALL STORAGE TANKS  
(MODEL 58)**

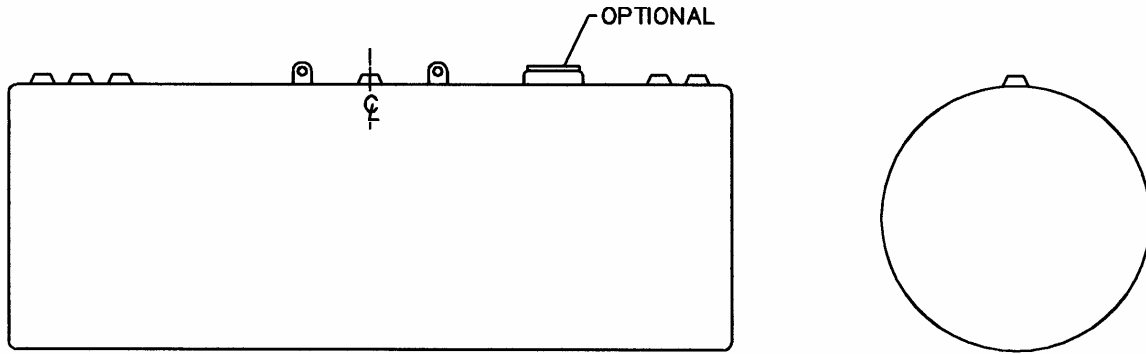

FITTING LOCATION SHOWN FOR 12'-0" LONG AND LONGER

APPROX. CAPACITY (GALLONS)	NOM. DIAMETER	NOM. LENGTH
560	48"	6'-0"
1,120	48"	12'-0"
1,000	64"	6'-0"
2,000	64"	12'-0"
3,000	64"	18'-0"
4,000	64"	24'-0"
4,000	96"	10'-8"
6,000	96"	16'-0"
8,000	96"	21'-4"
10,000	96"	26'-8"
12,000	96"	32'-0"
15,000	96"	40'-0"
10,000	120"	17'-0"
12,000	120"	20'-6"
15,000	120"	25'-6"
20,000	120"	34'-1"
25,000	126"	38'-10"
30,000	126"	46'-6"
40,000	144"	47'-3"
50,000	144"	59'-2"

Tank lengths listed above are based on nominal inner tank dimensions.  
Overall tank lengths will vary during actual manufacturing.

**STANDARD SPECIFICATIONS**

- Built per UL 58 , 1746 part II and ACT-100 tank specifications. Tanks will bear UL 1746 part II and ACT-100 labels.
- Modern's standard 2000 opening locations and required lifting lugs.
- Dual protection available P3 / ACT-100 when required
- Exterior is coated per ACT-100 requirements.
- Striker plates provided under all fitting openings.
- Optional 24" reverse flange manway with or without fitting openings in cover.
- Interior coating systems available upon request.
- Other tank sizes available upon request.