
NOTES:

- A. Quantity: _____ Oil Water Separator(s).
- B. Material: Carbon Steel per UL-58.
- C. Design & Operating Pressure: Atmospheric.
- D. Design & Operating Temperature: 40 degrees to 120 degree
- E. Separator to be Built & Labeled Per UL 2215.
- F. Interior: Abrasive blast and lined with UL listed coating.
- G. Exterior: Corrosion protection per UL1746.
- H. Electronics: To be furnished by separator manufacturer as specified.
- I. All Fittings to be Protected for Shipment.
- J. Customer has the Responsibility to Verify all Dimensions.

NOZZLE SCHEDULE													
QTY.	ITEM	SIZE	RATING	TYPE	MATL.	PROJ. IN	PROJ. OUT					NOTES	
												Net	NOTES
1	Α	30"	PRESSED	MANWAY	C.S.	1/4"							VENT
1	В	24"	PRESSED	MANWAY	C.S.	1/4"	AS SHWN.						SLUDGE REMOVAL
. 2	С	2"	STD. NPT.	HF. CPLG.	C.S.	0"	AS SHWN.						VENT
1	D	8"	150# FLG.	S.O.R.F.	C.S.	1/4"	AS SHWN.						INLET
1	E	8"	150# FLG.	S.O.R.F.	C.S.	1/4"	AS SHWN.						OUTLET
2	F	2"	STD. NPT.	HF. CPLG.	C.S.	0"	AS SHWN.						VENT
1	G	2"	STD. NPT.	HF. CPLG.	C.S.	1/4"	AS SHWN.						OIL LEVEL CONTROL
1	Н	2"	STD. NPT.	HF. CPLG.	C.S.	1/4"	AS SHWN.						OIL PUMP OUT
,		0"	OTD NDT	113.711	0.0	0"	0"						DIEELIGED

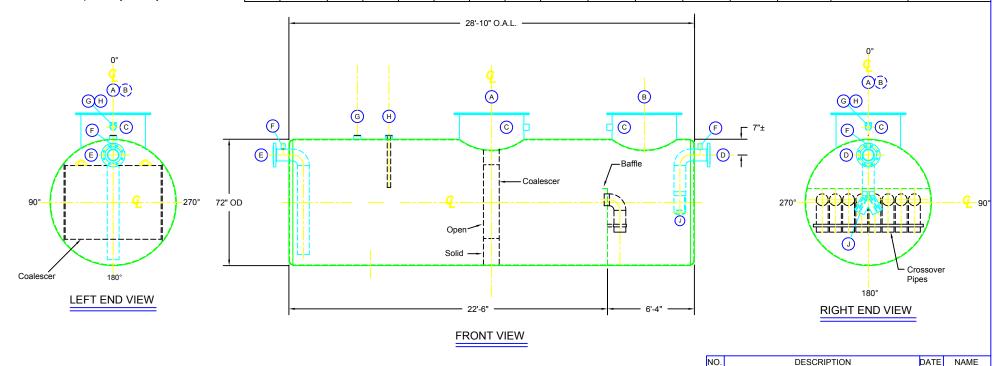

Disclaimer:

This drawing is provided for informational purposes only. Final size, flow rate, or efficiency will be determined at placement of order with the Modern Welding Company subsidiary which manufacturers the Kleerwater separator. User takes full responsibility of the use and application of this illustration.

•		REVISIONS	
	Modern	Welding Co	mpany
VESSEL DES 5,00		eerWater Oil Water S	Separator Tank
CUSTOMER	:		P.O.#
DATE:	SCALE: N.T.S.	DWG.# \OWS\5000KW	DRAWN BY: CHKD, BY: